

PATENT APPLICATION TRANSMITTAL LETTER
(Small Entity)

Docket No.
6762-102XX

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Sywe N. LEE and David WAYNE

For: **INTERLACE OVERLAP PIXEL DESIGN FOR HIGH SENSITIVITY CMOS IMAGE SENSORS**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. **EL341556547US**
- ☒ **8** sheets of drawings.
- ☐ A certified copy of a _____ application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☒ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ _____ Verified Statement(s) to Establish Small Entity Status Under 37 C.F.R. 1.9 and 1.27.
- ☒ Other: **Assignment and Recordation Form Cover Sheet**

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	7	- 20 =	0	x \$9.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$39.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$380.00
TOTAL FILING FEE					\$380.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **50-0337** as described below. A duplicate copy of this sheet is enclosed.
 - ☒ Charge the amount of **\$380.00** as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: **November 4, 1999**


Signature

M. John Carson, Esq.
Registration No. 25,090
FULBRIGHT & JAWORSKI L.L.P.
865 South Figueroa Street
29th Floor
Los Angeles, CA 90017-2576
213-892-9200

cc: **LJW & client**

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) AND 1.27(c)) - SMALL BUSINESS CONCERN

I hereby declare that I am

Check one

- a) () the owner of the small business concern identified below:
b) (X) an official of the small business concern empowered to act on behalf of the concern identified below:

Insert company

name and

address

➤ NAME OF CONCERN: Taiwan Advanced Sensors Corporation
ADDRESS OF CONCERN: 4F., No. 75, Sec. 1, Hsin Tai Wu Road, Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

Insert title of

application,

inventor's

names

➤ I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled INTERFACE OVERLAP PIXEL DESIGN FOR HIGH SENSITIVITY CMOS IMAGE *by inventor(s) Sywe N. Lee and David Wayne described in

*SENSORS

Check one,

fill in if

b) or c)

- a) (X) the specification filed herewith.
b) () application serial no. _____, filed _____
c) () patent no. _____, issued _____

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c), if that person had made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). **NOTE:** Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Insert co-owners,

if any, and check

a), b) or c)

NAME _____

ADDRESS _____

a) () INDIVIDUAL b) () SMALL BUSINESS CONCERN c) () NONPROFIT ORGANIZATION

NAME _____

ADDRESS _____

a) () INDIVIDUAL b) () SMALL BUSINESS CONCERN c) () NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereof, or any patent to which this verified statement is directed.

Insert

➤ NAME Sywe N. LeeTITLE PresidentADDRESS 4F., No. 75, Sec. 1, Hsin Tai Wu Road, Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

Sign, date

➤ SIGNATURE Sywe N. Lee DATE 22 October 1999

INTERLACE OVERLAP PIXEL DESIGN FOR HIGH SENSITIVITY CMOS IMAGE SENSORS

FIELD OF INVENTION

5 The present invention relates to a CMOS type image sensor and, in particular, to a special pixel structure to enhance the sensitivity and picture quality of the CMOS type image sensor.

BACKGROUND OF INVENTION

10 An image sensor is used to transform an optical image focused on the sensor into an electrical signal. The image sensor typically contains an array of light detecting elements, wherein each element produces an analog signal in response to the light intensity of an image impinging on the element when the image is focused on the array. These signals from the sensor array may then be used to display a corresponding image on a display.

15 One very well known type of the image sensor is the charge-coupled device (CCD). An integrated circuit chip containing CCD image sensors is expensive due to the specific process required. The CCD also requires relatively large power dissipation, because of the required clock signals and the high voltage that is usually needed. Compared with the CCD image sensor, a CMOS active pixel sensors (APS) has attracted much attention
20 recently because of its capability of monolithic integration of the circuits of control, drive and signal processing into a single sensor chip. The advantages of the CMOS APS imager are: low voltage operation and low power consumption, process compatibility with on-chip electronics, and potentially lower cost, as compared with the conventional CCD. This is
25 derived from the wide availability of a standard CMOS manufacturing process.

However, it has been well known that the CMOS image sensor suffers from noise issues which can adversely degrade the performance. These

noises include kTC noise associated with the sampling of the image data; 1/f noise associated with the circuits used to amplify the image signal; and fixed pattern noise associated with non-uniformity, primarily between columns within the array. These noise issues significantly become major factors causing the CMOS active pixel sensor to have lower sensitivity or lower dynamic range compared to the CCD.

Figure 1A illustrates the architecture of a conventional CMOS image sensor of 512 by 512 active pixels formed on a single integrated circuit chip. Some examples of the conventional CMOS image sensors can be seen in US Patent Appln. No. 09/103,959 and USP. No. 5,900,623. An image sensor core 19 comprises a two-dimensional pixel array of light detecting elements 10 which include identical circuitry shown in Figure 1B. When in sensing, an image is focused on the image sensor core 19 such that different portion of the image impinges on each pixel element 10. As shown in Figure 1B, each light detecting element 10 comprises a photodiode 20, or an equivalent photo sensing device, such as a photogate, bipolar phototransistor, etc., the conducting current of which is proportion to the intensity of the light impinging upon the junction of the photo sensing device.

At the beginning of the exposure cycle, an internal column line 24 is isolated because an access transistor T3 is turned off due to the inactive state of the RD signal. The photodiode 20 is initially reset to a value close to Vref level by means of the reset transistor T1, which is turned on by the active high state of the signal RST output from the row address shift register (not shown). All the operations of the conventional CMOS image core 19 can be illustrated with reference to US Patent Application No. 09,103,959 filed on June 24, 1998 by the same applicant, which is incorporated herein by reference.

The exposure commences as the reset transistor T1 is turned off by the inactive state of the signal RST. This allows the photodiode current, due to the light impinging on it, to discharge from the capacitance of the floating

node Nd, reducing the charge on node Nd. The exposure time starts at the falling edge of the RST signal and stops at the rising edge of the sequential RST signal. After a sufficient time from the commencement of the exposure time, which may be varied to provide different image sensitivity or exposure control, the access transistors T3 in the row are turned on by an active RD

5 signal for the row. This causes the photodiode voltage at node Nd, translated through the source follower transistor T2 and the access transistor T3, to be coupled to the internal column line 24. The voltage is offset by the source follower transistor T2, and, of course, will vary with the characteristics of

10 the transistor T2. This voltage will be sampled and held in a following correlated-double sampling (CDS) circuit (not shown) at the end of the column line 24. At the end of the exposure interval, the reset transistors T1 in the row are then turned on again, causing the input of the source follower T2, which is coupled to the cathode node P of photodiode 20, to be reset to a

15 value close to the Vref. The actual signal sensed by the CDS circuit is the difference of signals at node C, denoted as ΔV_c , before and after the reset signal RST is activated. The subtraction of the signals of the node C at different moments is accomplished by the well known CDS circuitry, which will not be described in detail in this invention. With the above principle, as

20 shown in Fig. 1B, the photodiodes 20 in each row are exposed to generate the current to the column lines in response to the reset signal for the row, i.e., RSTn, n = 1...512 as well as the corresponding read signal RDn, and the reset signal for each row is activated sequentially in time to obtain the voltage differences for all the rows.

25 In the NTSC (National Television Standards Committee) television system, the television picture, as an example, adopted for a solid state sensor is composed of a plurality of image pixels arranged in 525 horizontal rows. The picture is divided into an odd field and an even field. Odd numbered lines 1, 3, 5, etc. of a television picture are scanned first and displayed in the

30 odd field time. After the odd field has been scanned, even numbered lines 2, 4, 6, etc. of the television picture are scanned and displayed in the even field.

The scanning scheme in which the odd field is interlaced with the even field is so-called interlace scanning.

For compatibility reasons, the NTSC scanning scheme has been carried over to the digital camera employing the CMOS image sensor. For a conventional NTSC interlace scanning scheme, the pixel array of 512 by 512 pixels for illustration of simplicity would be first scanned in an order of rows 1, 3, 5, 7, ... and 511 for the odd field time by sequentially activating the reset signals RST_m, $m = 1, 3, 5, 7, \dots, 511$, then rows 2, 4, 6, 8, ... , and 512 for the even field time by sequentially activating the reset signals RST_m, $m = 2, 4, 6, 8, \dots, 512$ under the control of the row address shift register , wherein each field takes roughly 1/60 second within the 1/30 second frame time. In this conventional method, as shown in Fig. 1B, there are 512 access transistors T3 as well as source follower amplifiers T2, and 512 floating sensing nodes Nd per row in the array. Each floating sensing node Nd is driven by one photodiode.

The analog signals produced by the light detecting elements 10 are apt to be contaminated by the above-mentioned types of noise, causing CMOS active pixel sensors to have lower sensitivity or lower dynamic range as compared to the CCD.

Therefore, improvement of sensitivity or dynamic range becomes a critical technical challenge for CMOS image sensor designers. The present invention intends to increase pixel sensitivity and to improve the overall image quality through a special pixel design arrangement.

SUMMARY OF INVENTION

An active pixel image sensor fabricated by a CMOS process is described herein which includes a two-dimensional pixel array core of photodiodes, the conductivity of which is related to the intensity of light impinging upon each of the photodiodes. The analog signal thus generated is buffered through a source follower amplifier, accessed by row transistors

and coupled to respective columns in the array.

In one preferred embodiment of the present invention, by adding a transistor coupling each of two adjacent row pixel photodiodes in the column direction, only a half of source followers and access transistors, compared to
5 the conventional CMOS image sensor, will then be needed, thus significantly halving the number of elements in the CMOS sensors.

Especially, by scanning the array with alternating row enable signals Eg1, Eg2, ... ,Eg256 sequentially for the even field and Og1, Og2, ... , Og256 sequentially for the odd field, the scanning scheme of the present
10 invention is equivalent to that of the conventional interlaced scanning method in an order of rows (1, 2), (3, 4), (5, 6), ..., (511, 512) for odd frame, then rows (2,3), (4,5), (6, 7), ..., (510, 511), 512. Obviously, the approach of the invention provides better picture image quality than the known technique which uses repeated scanning of the same rows for both odd and even fields.
15 In addition, with signals Egn & Ogn alternating sequentially between odd and even fields, each floating sensing node Nd corresponding to one pixel will be driven concurrently by two photodiodes corresponding with two adjacent pixels in the adjacent rows, which significantly enhances the sensitivity of the pixel by a factor of roughly two as compared with the
20 conventional scheme shown in Fig. 1A. Moreover, according to one embodiment of the present invention, an amplifier transistor which couples the gate of the source follower T2 and the photodiode simultaneously acts as an amplifier which can increase the signal gain several times over. Thus, the sensitivity of a CMOS image sensor can be additionally enhanced
25 significantly towards the goal of matching CCD performance.

Therefore, one object of the present invention is to increase the pixel sensitivity and to improve the overall image quality by a special pixel design arrangement.

Another object of the present invention is to significantly reduce the

size and manufacture cost of the CMOS sensor by a special pixel design arrangement, while still maintaining or even enhancing the pixel sensitivity and image quality thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Other aspects and advantages of the invention will become apparent from the following descriptions taken in conjunction with the accompanying drawings, wherein:

Fig. 1A shows a simplified schematic block diagram of a conventional CMOS image sensor consisting of 512 by 512 active pixels of Fig. 1A;

10 Fig. 1B shows a schematic diagram of the photocell structure of an active pixel employed in Fig. 1A;

Fig. 2A shows a simplified schematic block diagram of a CMOS image sensor consisting of 512 by 512 active pixels according to one embodiment of the present invention;

15 Fig. 2B shows a schematic diagram of the photocell structure of an active pixel employed in the CMOS image sensor of Fig. 2A;

Fig. 3 illustrates a timing diagram of the signals employed in the CMOS image sensor of Fig. 2B;

20 Fig. 4A shows a simplified schematic block diagram of a CMOS image sensor consisting of 512 by 512 active pixels according to another embodiment of the present invention;

Fig. 4B shows a schematic diagram of the photocell structure of an active pixel employed in the CMOS image sensor of Fig. 4A; and

25 Fig. 5 shows the enabling scheme for rows of pixels during the odd field and even field according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present application now will be described more fully (hereinafter

parenthesized with reference to the accompanying drawings), in which embodiments of the invention are shown. Although one of the embodiments illustrated relates to a CMOS image sensor application, those skilled in the art will appreciate that this invention may be embodied in many different forms set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

Reference now will be made in detail to the preferred embodiments of the present invention as illustrated in the accompanying drawings in which like reference numerals designate like or corresponding elements throughout the drawings.

Figure 2A illustrates a CMOS image sensor array of 512 by 512 active pixels according to one preferred embodiment. Though the numbers of these pixels have been reduced for purposes of illustration, it should be understood that a more typical number of columns and rows will be adopted for the application of typical television systems. An image sensor core 21 comprises a two-dimensional pixel array of light detecting elements 22, each of which includes identical circuitry as shown in Figure 2B.

According to one embodiment of the present invention, as shown in Fig. 2A, the CMOS image sensor core 21 has a geometric configuration of pixels comprising a plurality of pairs of light-detecting elements 22 arranged in rows and columns for generating respective analog signals in proportion to the intensity of the light impinging respective on one of the light-detecting elements 22. Each pair of light-detecting elements 22, for example, the first pair of light-detecting elements 22 in row 1 as shown in Fig. 2B, comprises a first photodiode Pd1 connected to a turn-on transistor To, and a second photodiode Pd2 connected to a turn-on transistor Te. The respective gates of the turn-on transistors Te and To, denoted as O and E, are connected to an odd gate control line Og1 and an even gate control line Eg1, respectively. The respective gates of the turn-on transistors Te and To in the pairs of

light-detecting elements 22 in the same row are connected to a common odd gate control line Og1 and a common even gate control line Eg1, respectively.

Further, the first and second photodiodes Pd1, Pd2 in each pair of light-detecting elements 22 in the column direction are coupled in parallel at a floating sensing point Nd through the turn-on transistor To. Each pair of the light-detecting elements 22 further comprises translating means 23 coupled to said floating sensing point Nd for resetting the initial state of the floating sensing point Nd and reading out said analog signals to a column line 24. Slightly differing from the prior art, the translating means 23 further comprises an amplifier transistor T4. A signal RX connected to the gate of the amplifier transistor T4 is a DC bias voltage regardless of even or odd frame time. The voltage of the signal RX depending on the application or fabrication process is so configured that the transistor T4 acts as an amplifier for further amplifying the signal flowing between nodes Nd and Ng. The general operation of the translating means 23 has been detailed above.

In addition, said first and second photodiodes in adjacent pairs of light-detecting elements 22 in the adjacent rows, such as those denoted by S(1, 1) and S(2, 1), in the column direction are coupled in parallel through the turn-on transistor Te.

With the geometric pixel configuration of Fig. 2B, one single odd gate control line Ogn ($n=1...256$) will enable the odd turn-on transistors To in the same row, thereby rendering the photocurrents acquired in the first photodiode Pd1 and the second photodiode Pd2 of each pair of light-detecting elements 22 in that row exhibiting at the floating sensing point Nd. Similarly, one single even gate control line Egn ($n=1...256$) will enable the even turn-on transistors To in the same row, thereby rendering the photocurrent acquired in the first photodiode Pd1 of each pair of light-detecting elements 22 in that row and the second photodiode Pd2 of each pair of light-detecting elements 22 in the adjacent row exhibiting at the floating sensing point Nd. In other words, each single gate control line can enable the

generation of the photocurrents acquired in two rows of photodiodes and two adjacent gate control lines can, in effect, enable four rows of photodiodes with two rows of photodiodes repeated.

For a CMOS image sensor adopted for an NTSC TV system, the pixel array is scanned 60 fields per second with odd and even fields alternatively, to achieve 30 frames per second operation. As shown in Figure 3, during the odd field time, for the first row, the exposure time of the taken image starts right at the time when an active high signal RST1 briefly turns on the transistor T1 of the first row. The configuration that the transistor T1 is turned on by the active high signal RST1 renders the voltage level of the node Ng of the first row approximately equal to the reference voltage Vref, and also sets the voltage of the photodiode Pd1 or Pd2 to an initial reference level, wherein the voltage level of the node Ng of the first row is the gate voltage of the source follower transistor T2.

According to the present invention, for the first row, the first odd gate control signal Og1 is configured to enable right at the time leading the rising edge of the active high signal RST1 by about 1-2 $\mu\text{sec}(\text{s})$ (denoted by t1), and then to be maintained at a logic high "1" level for at least the exposure time of the photodiode, which includes the pulse width of the RST1 signal, wherein the exposure time will not exceed one single field time. The configuration that the active high signal Og1 slightly leads the active high signal RST1 ensures that the turn-on transistor To has sufficient time to be turned on before the active high signal RST1. Similarly, for the second row, the signals RST2 and Og2 will be then turned on in the same way as RST1 and Og1, right at the time when one scan line time expires after the RST1 and Og1 are enabled. Similar operations are set forth for RST3, Og3, ..., and RST256, Og256, sequentially in time. Also, for the first row, at the time leading the exposure time for RST1 by about 1-2 $\mu\text{sec}(\text{s})$ (denoted by t2), a read signal RD1 will go to a logic high "1" to turn on the access transistor T3 to connect the source follower transistor T2 to the column line 24. Then, at

1-2 $\mu\text{sec(s)}$ later, after the rising edge of the active high RD1 signal, RST1 will go to logic high "1" level again to turn on the reset transistor T1, thereby resetting the reference condition of Ng. The leading time t2 for RD1 ensures that the access transistor T3 has sufficient time to be turned on. The signal voltage difference at the column line 24 before and after the assertion of RST1 will represent the analog voltage signal of the pixel photodiode in row 1. After one scan line time, RD2 and RST2 will be enabled, and similarly for RD3, RST3, ... ,RD256, RST256 sequentially in time. The timing operation for an even frame is similar to that for an odd frame as shown in Figure 3.

In the timing operation described above, during the odd frame time, the turn-on transistor To in each pair of light detecting elements 22 in the odd rows is turned on sequentially from rows 1, 3, to 511. As mentioned above, the floating sensing node Nd in each pair of light detecting elements 22 in the odd rows is driven two pixel photodiodes in the two adjacent rows, thereby generating the current flow twice as many as that of the conventional scheme shown in Fig. 1A. Therefore, the overall sensing capability of the image sensor core 21 is significantly doubled as compared to the conventional type. The voltage differences at nodes Nd and Ng are more in detail with reference to US Patent Application No. 09/103,959.

According to another embodiment of the present invention, referring to Fig. 4A, which is slightly different from Fig. 2A in the light-detecting elements 22, each pair of light-detecting elements 22, for example, the first pair in row 2, comprises the first photodiode Pd1 connected to two turn-on transistors To and Te respectively located in the adjacent pair of the adjacent row, and the second photodiode Pd2 connected to two turn-on transistors To and Te configured in a back-to-back manner located in that pair. The respective gates of the turn-on transistors Te and To, denoted as O and E, are connected to different gate control lines Og1 and Eg1, respectively. As mentioned above, the respective gates of the turn-on transistors Te and To in each pairs of light-detecting elements 22 in the same row are connected to a

common odd gate control line Og1 and common even gate control line Eg1, respectively.

The first and second photodiodes Pd1, Pd2 in each of the pairs of light-detecting elements 22 are coupled in parallel in the column direction at the floating sensing point Nd through two turn-on transistors To. The translating means 23 coupled to said floating sensing point Nd in this case operates in the same way as Fig. 2A.

In addition, said first and second photodiodes in adjacent pairs of light-detecting elements 22 in the adjacent rows are serially coupled in the column direction through two turn-on transistors Te.

With the geometric pixel configuration of Fig. 4B, one single odd gate control line Ogn ($n=1...256$) will enable the odd turn-on transistors To in the same row, thereby rendering the photocurrents acquired in the first photodiode Pd1 and the second photodiode Pd2 of each pair of light-detecting elements 22 in that row exhibiting at the floating sensing point Nd. Similarly, one single even gate control line Egn ($n=1...256$) will enable the even turn-on transistors Te in the same row, thereby rendering the photocurrent acquired in the first photodiode Pd1 of each pair of light-detecting elements 22 in that row and the second photodiode Pd2 of each pair of light-detecting elements 22 in the adjacent row exhibiting at the floating sensing point Nd. In other words, each single gate control line can enable the generation of the photocurrents acquired in two rows of photodiodes and two adjacent gate control lines can in effect enable four rows of photodiodes with two rows of photodiodes repeated. Persons skilled in the art will appreciate that the principle of the present invention can be applied to some other types of structure in which each pair of light-detecting means 22 comprises three or more photodiodes connected in parallel in the column direction at the floating sensing point Nd and each single gate control line can enable the generation of the photocurrents acquired in three rows of photodiodes and two adjacent gate control lines can in effect enable six rows of photodiodes

with four rows of photodiodes repeated.

According to one embodiment of the present invention, as shown in Figure 2B, 256 scan lines (Og1, Eg1), (Og2, Eg2) ... (Og256, Eg256) and reset signals (RST1, RST2, ..., RST256) and read signals (RD1, RD2, ... RD256) are connected to a row address shift register (not shown), the detail of which is well known in the art and will not be described herein. By scanning the array with sequential odd row scanning signals Og1, Og2, ..., Og256 for the odd field and with sequential even row scanning signals Eg1, Eg2, ... and Eg256 for the even field, the resultant scanning effect is equivalent to that of the conventional interlaced scanning method in an order of rows (1, 2), (3, 4), (5, 6), ..., (511, 512) for odd frame, then rows (2, 3), (4, 5), (6, 7), ..., (510, 511). However, according to two embodiments of the present invention as shown in Figs. 2-4, each single gate control line can enable the generation of the photocurrents acquired in two rows of photodiodes and two adjacent gate control lines can in effect enable four rows of photodiodes with two rows of photodiodes repeated. Within the odd field scan time or even field scan time, the analog signals sequentially received from the column lines 24 are processed by the following circuits, such as CDS circuit, analog multiplier in combined with an NTSC encoder to generate corresponding analog signals.

As shown in Fig. 5, the digital signals enabled by the odd numbered gate control lines (i.e., the odd field) actually contains the odd image information from the odd numbered rows as well as the even numbered rows and similarly, the digital signals enabled by the even numbered gate control lines (i.e., the even field) actually contains the even image information from the even numbered rows as well as the odd numbered rows. In other words, the odd image information has correlation with the even image information. The components of the odd field and even field are correlated with one another and the time difference thereof is less than 1/60 second. As proved in the art of color television, this approach of the invention provides better picture image quality than the known technique which uses repeated

scanning of the same rows for both odd and even fields. In addition, with the gate control signals Egn & Ogn alternating sequentially between odd and even fields, each floating sensing node Nd corresponding to one pixel will be driven concurrently by two photodiodes corresponding with two adjacent pixels in the adjacent rows, which significantly enhances the sensitivity of the pixel by a factor of roughly two as compared with the conventional scheme shown in Fig. 1A.

As mentioned above, the amplifier transistor T4 is biased by the signal RX, causing the signal between nodes Nd and Ng to undergo amplification. According to the software simulation result, the overall sensitivity of the present invention can be increased as much as eight times greater than the conventional scheme. One additional advantage of the present invention is that odd and even fields are passed through the same amplifier transistor T4, source follower T2 and access transistor T3, which significantly mitigates pattern noise due to process variations in fabrication of these transistors. It is also notable that rather than 512 transistors, as in the case of conventional approach, according to the specific scheme of the present invention, only 256 reset transistors T5, source follower transistors T2, and access transistors T3 are needed, which significantly lower the manufacture costs and size of the image sensor core. As a result, the preferred embodiment method can improve the sensitivity of CMOS active pixel image sensor significantly, making its performance similar to that of a CCD.

Although the invention has been disclosed in terms of preferred embodiments, the disclosure is not intended to limit the invention. The invention still can be modified on varied by persons skilled in the art without departing from the scope and spirit of the invention which is determined by the claims below.

CLAIMS:

1. An image sensor for sensing the light of an image impinging thereupon and for translating the image into a standard television format, said image sensor comprising a plurality of pairs of light-detecting elements arranged in rows and columns for generating respective analog signals in proportion to the intensity of the light impinging respectively on one of the light-detecting elements, characterized in that each pair of light-detecting elements comprises:

(1) a first photodiode;

(2) a second photodiode;

(3) at least one turn-on transistor coupled to each of said first and second photodiodes and having a gate, wherein said first and second photodiodes in each pair of light-detecting elements are coupled in parallel in the column direction at a floating sensing point through said at least one turn-on transistor; and

(4) translating means coupled to said floating sensing point for resetting the initial state of said floating sensing point and reading out said analog signals to a column line;

wherein said first and second photodiodes in adjacent pairs of light-detecting elements are coupled in parallel in the column direction such that said at least one turn-on transistors coupled to said first and second photodiodes are sequentially controlled by first and second gate control lines coupled to the gate of said at least one turn-on transistor, respectively and analog signals acquired in said first and second photodiodes of one of the same pairs and the adjacent pairs present at said floating sensing point in response to one of said first and second gate control lines, thereby enhancing the light sensitivity of said image sensor.

2. The image sensor of claim 1, wherein said analog signals acquired in said photodiodes controlled by said first gate control lines constitute first field signals and said analog signals acquired in said photodiodes controlled by said second gate control lines constitute second field signals, wherein the components of said first field and second signals are correlated with one another and the time difference thereof is less than 1/60 second, thereby improving the quality of said image displayed in a television.

3. The image sensor of claim 1, wherein said translating means further comprises an amplifier transistor for amplifying the analog signals presenting at said floating sensing point.

4. The image sensor of claim 1, wherein said translating means comprises a reset transistor for resetting the initial state of said floating sensing point in response to a reset signal and a source follower transistor and another turn-on transistor coupled to said column line.

5. The image sensor of claim 1, wherein said first and second photodiodes in each pairs of light-detecting elements each connects to one turn-on transistor enabled by a specific gate control line such that said first and second photodiodes are coupled together at said floating sensing point in response to said specific gate control line.

6. The image sensor of claim 1, wherein said first and second photodiodes in each pairs of light-detecting elements each connects to two turn-on transistors enabled by two different gate control lines such that said first and second photodiodes are coupled together at said floating sensing point.

7. A method for use in an image sensor for sensing the light of an image impinging thereupon and for translating the image into a selected television format comprising a plurality of pairs of light-detecting elements

arranged in rows and columns for generating respective analog signals in proportion to the intensity of the light impinging respectively on one of the light-detecting elements, each pair of light-detecting elements comprising: a first photodiode, a second photodiode, at least one turn-on transistor coupled to each of said first and second photodiodes and having a gate, wherein said first and second photodiodes in each pair of light-detecting elements are coupled in parallel in the column direction at a floating sensing point through said at least one turn-on transistor and translating means coupled to said floating sensing point for resetting the initial state of said floating sensing point and reading out said analog signals to a column line, wherein said first and second photodiodes in adjacent pairs of light-detecting elements are coupled in parallel in the column direction, the method comprising the steps of:

(1) generating respective analog signals in proportion to the intensity of the light impinging on respective one of the light-detecting elements;

(2) sequentially enabling the gates of said first gate control lines and then the gates of said second gate control lines; and

(3) obtaining said analog signals acquired in said first and second photodiodes of one of the same pairs and the adjacent pairs presented at said floating sensing point, in response to one of said first and second gate control lines.

INTERLACE OVERLAP PIXEL DESIGN FOR HIGH
SENSITIVITY CMOS IMAGE SENSORS

ABSTRACT

5 A structure of image sensor for sensing the light of an image
impinging thereupon and for translating the image into a standard television
format is disclosed.

10 The structure comprises a plurality of pairs of light-detecting elements
arranged in rows and columns for generating respective analog signals in
proportion to the intensity of the light impinging on respective one of the
light-detecting elements, a first and second photodiodes in each pairs of
light-detecting elements are coupled in parallel in the column direction at a
floating sensing point through at least one turn-on transistor, and the first and
second photodiodes in adjacent pairs of light-detecting elements are coupled
in parallel in the column direction through at least one turn-on transistor such
15 that the at least one turn-on transistors coupled to the first and second
photodiodes are sequentially controlled by a first and second gate control
lines coupled to the gate of the at least one turn-on transistors, respectively
and analog signals acquired in the first and second photodiodes of one of the
same pairs and the adjacent pairs presents at the floating sensing point in
20 response to one of the first and second gate control lines, thereby enhancing
the light sensitivity of the image sensor.

25 The analog signals acquired in the photodiodes controlled by the first
gate control lines constitute first field signals and the analog signals acquired
in the photodiodes controlled by the second gate control lines constitute
second field signals, wherein the components of the first field and second
signals are correlated with one another and the time difference thereof is less
than 1/60 second, thereby improving the quality of the image displayed in a
television connected to the image sensor.

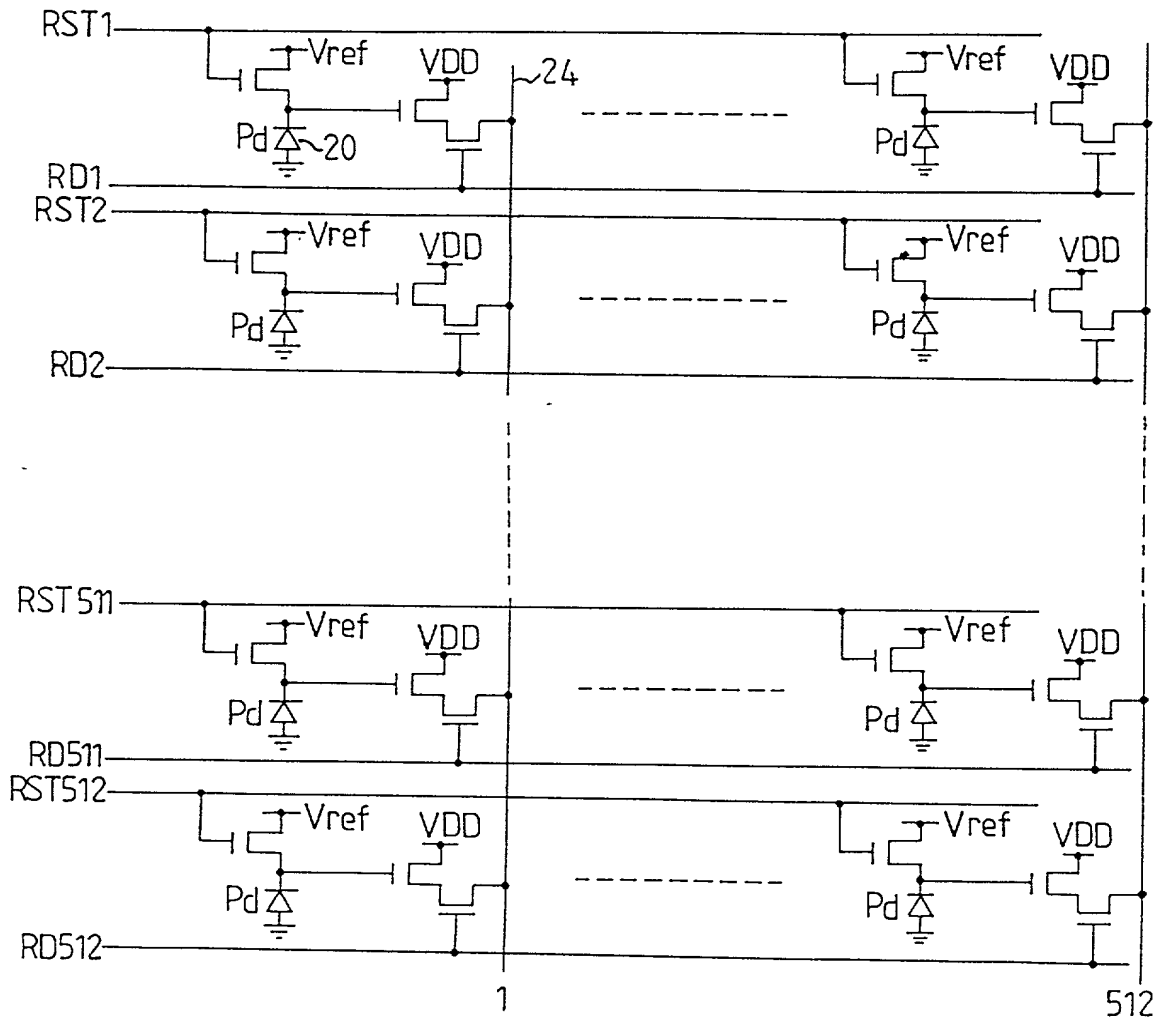


FIG.1 A

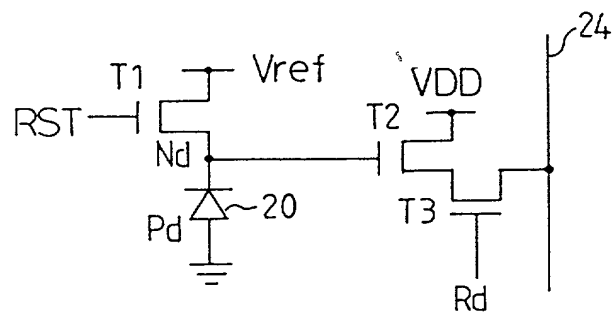


FIG.1B

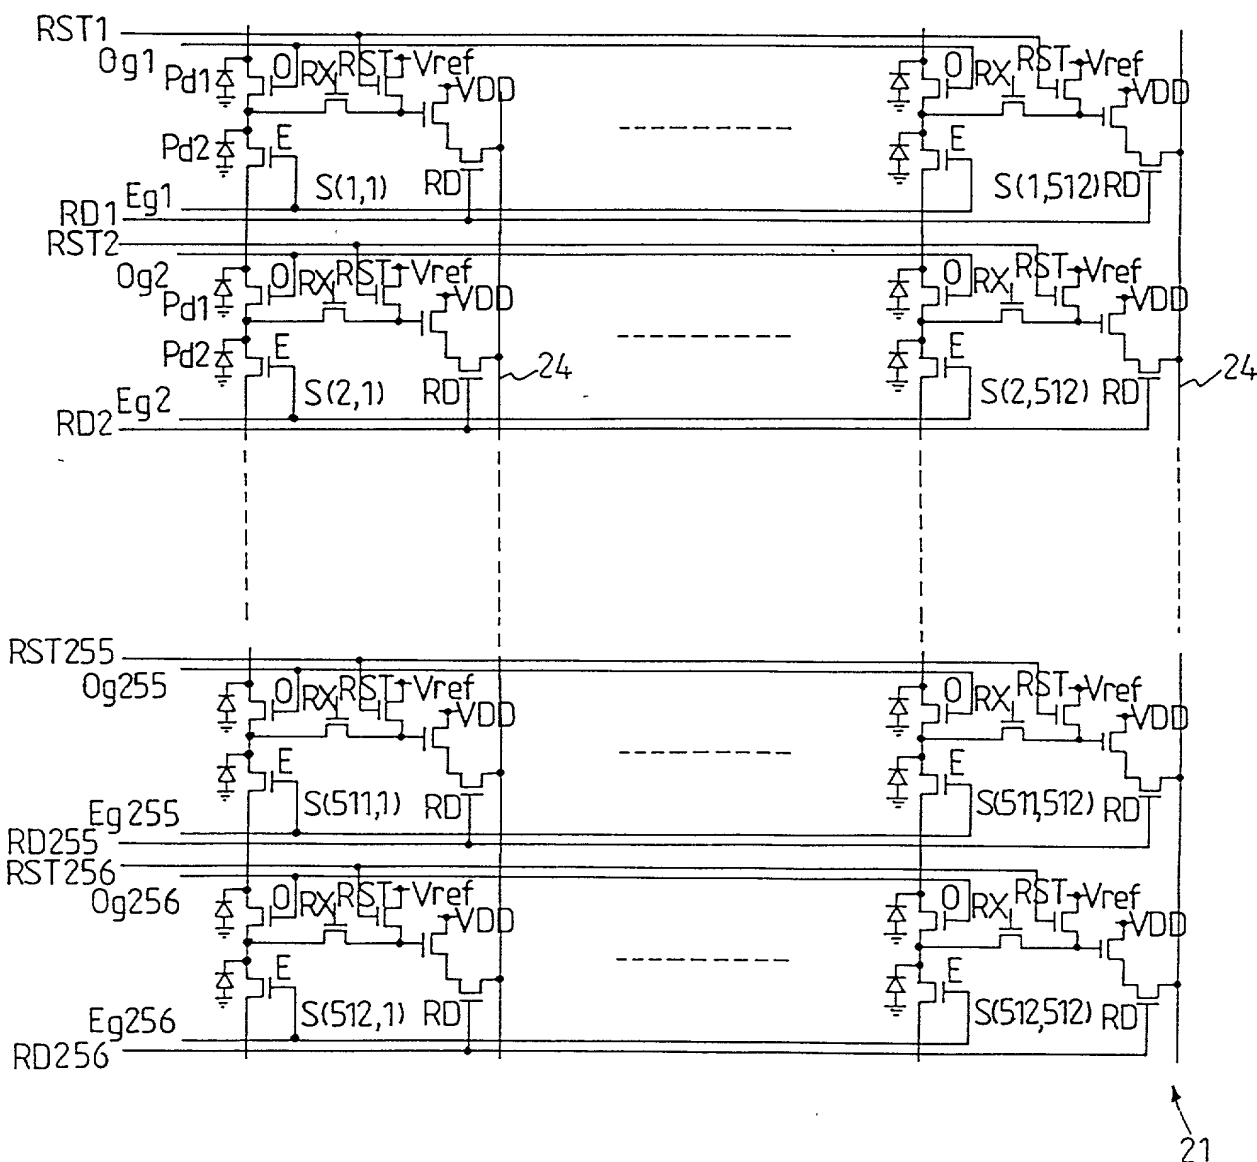


FIG.2A

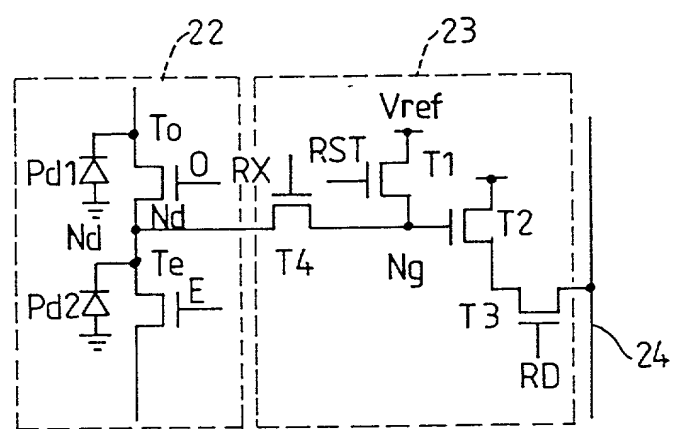


FIG.2B

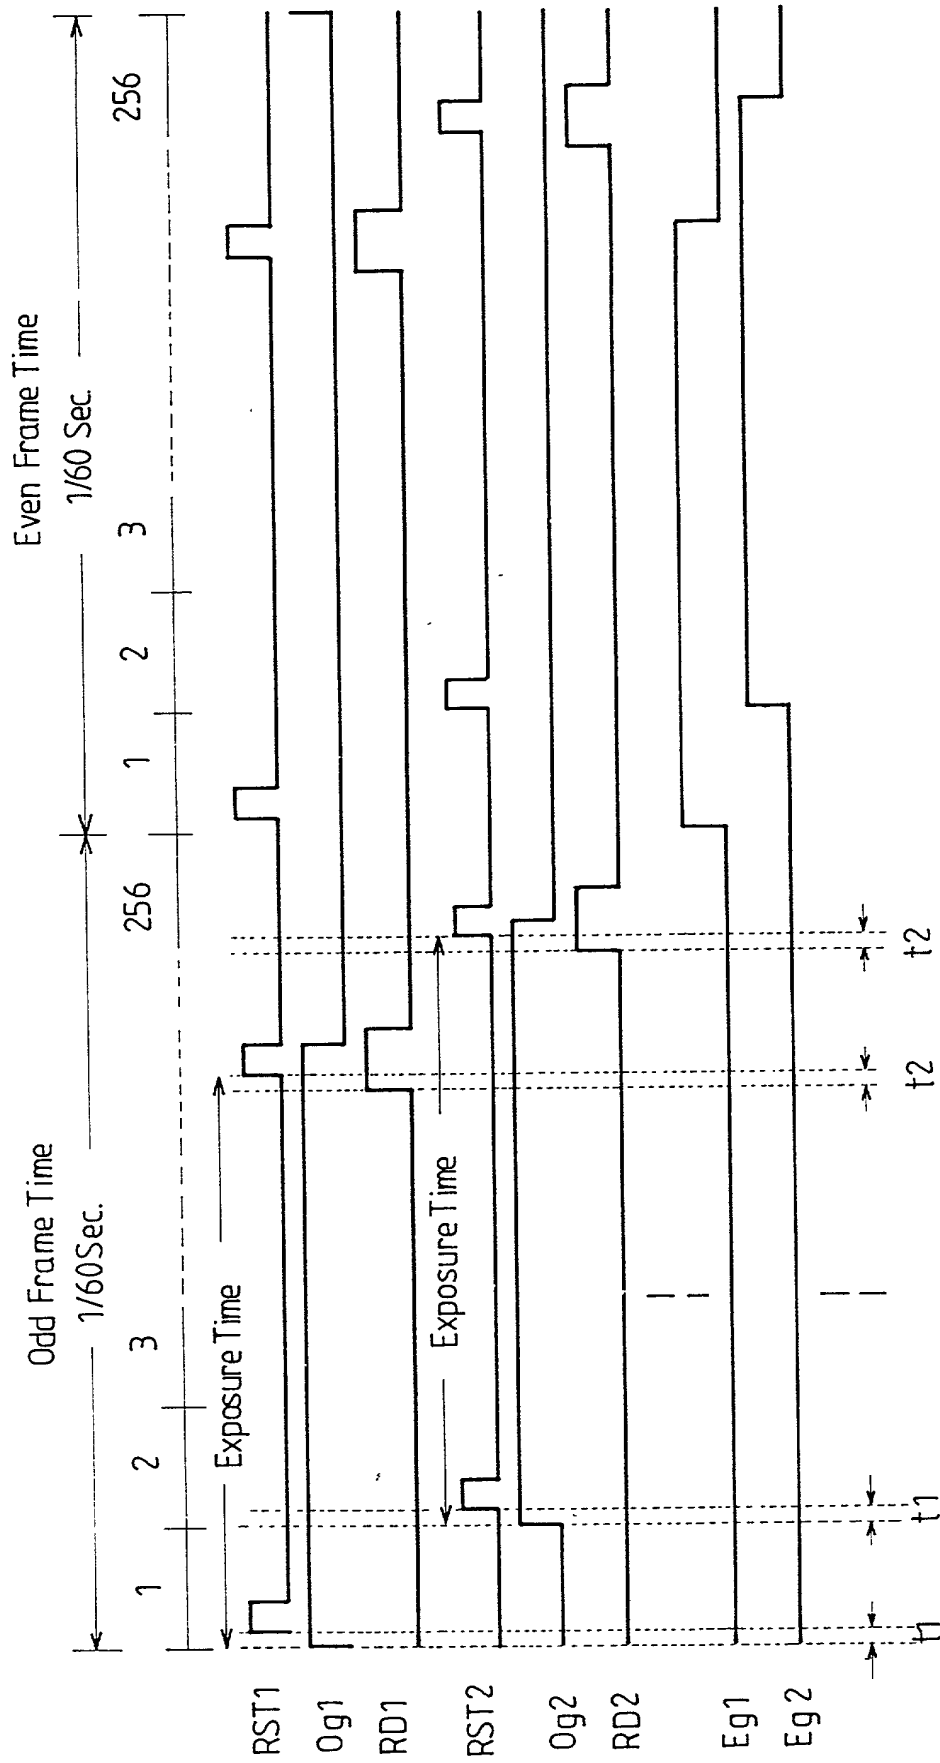


FIG.3

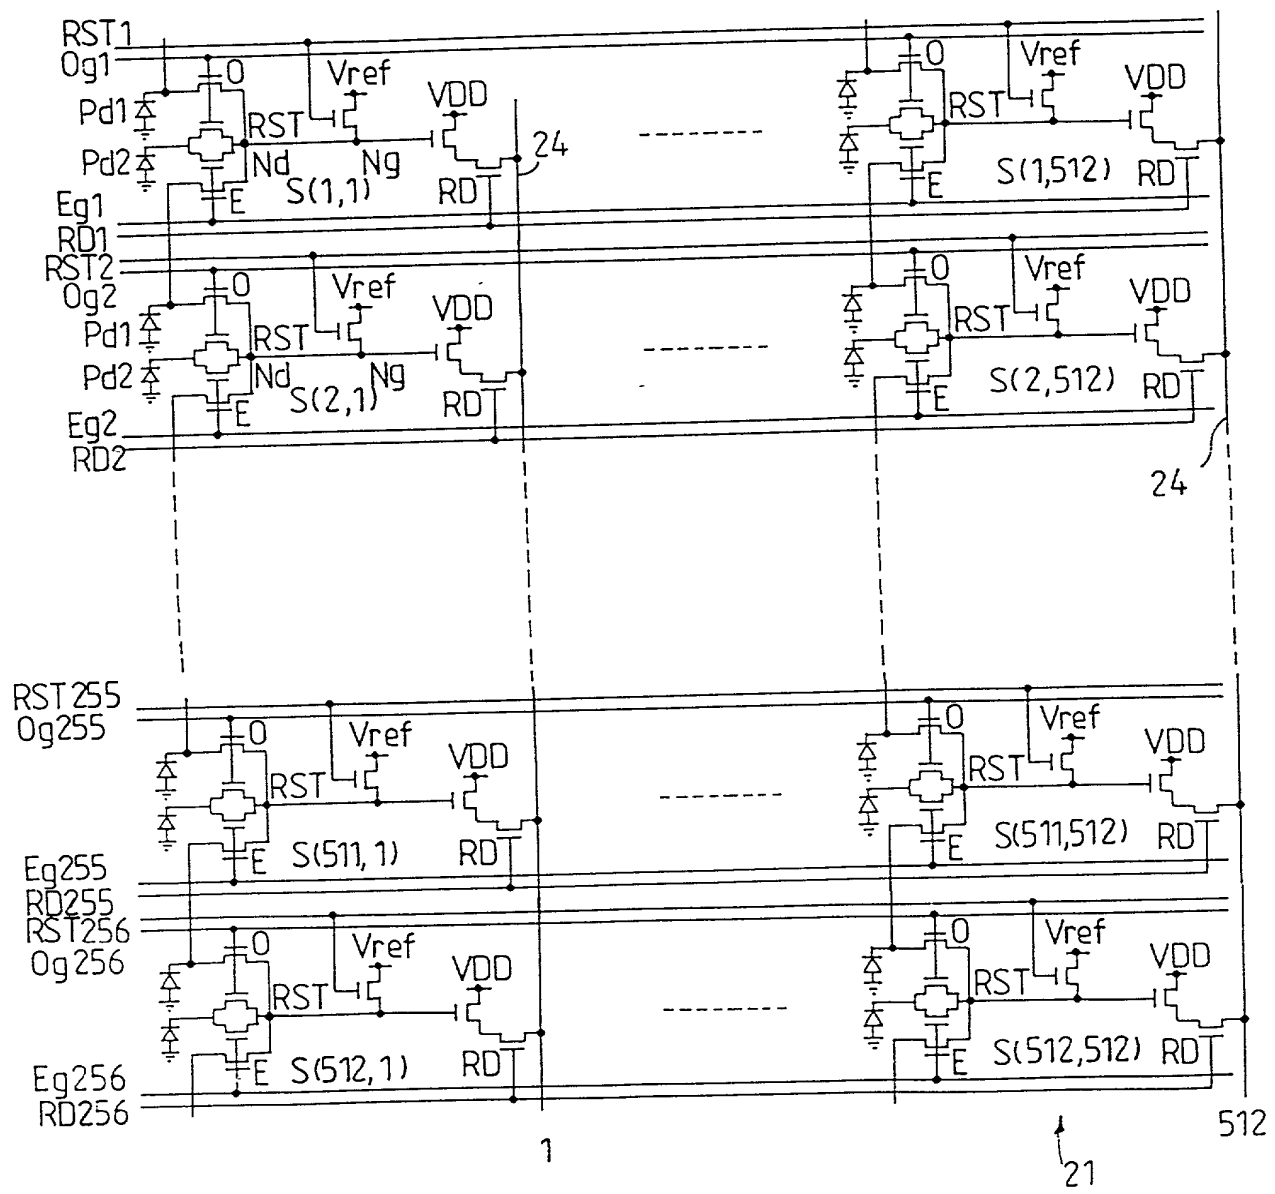


FIG.4A

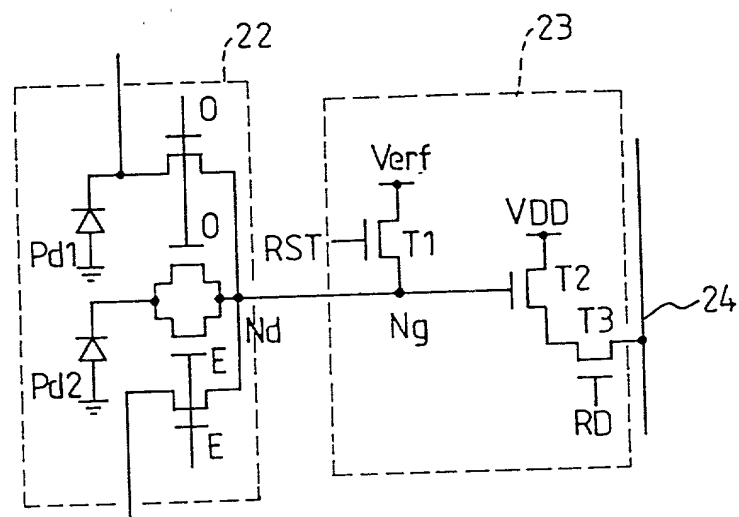


FIG.4B

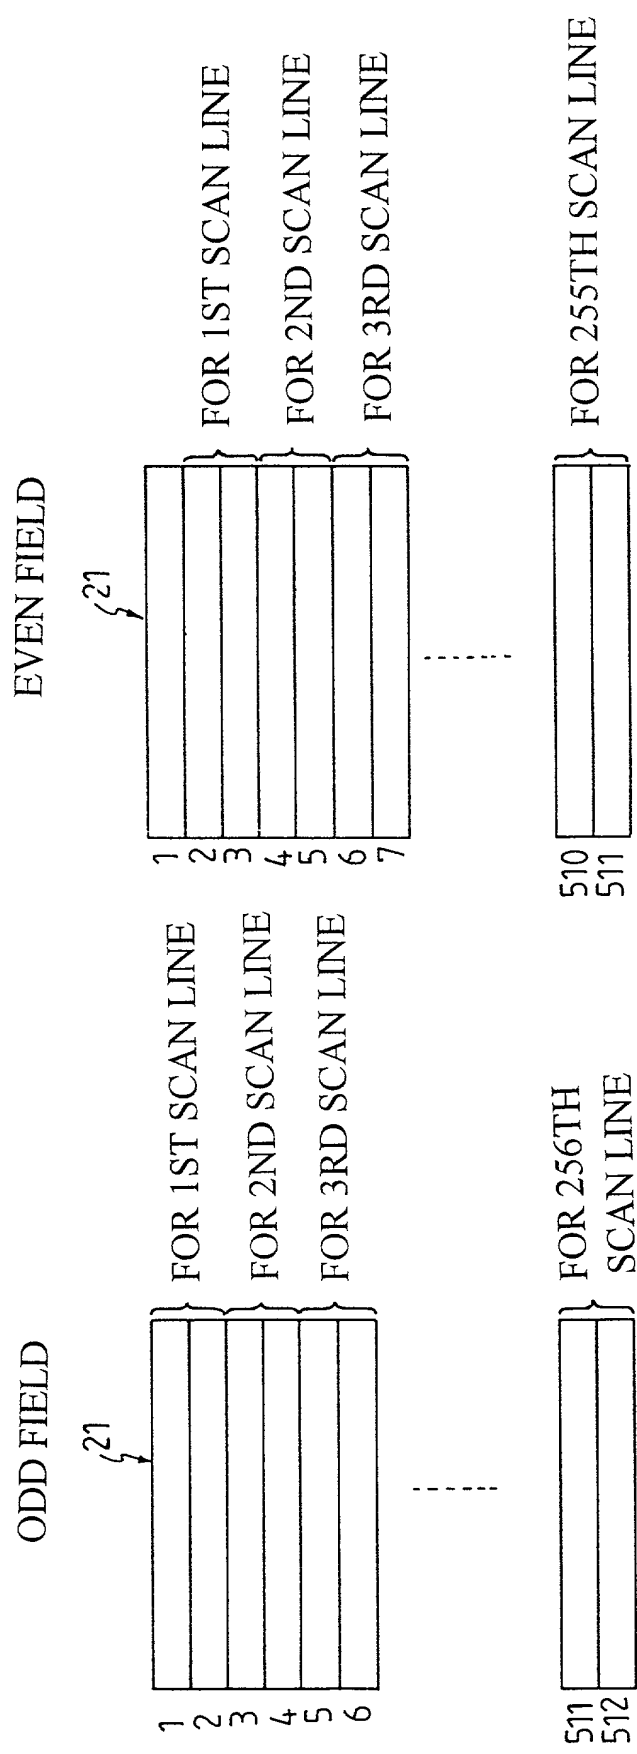


FIG.5

Docket No.
6762-102XX

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INTERLACE OVERLAP PIXEL DESIGN FOR HIGH SENSITIVITY CMOS IMAGE SENSORS

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I, hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Billy A. Robbins, Registration No. 18,313
 Robert Berliner, Registration No. 20,121
 M. John Carson, Registration No. 25,090
 John M. May, Registration No. 26,200
 Margaret A. Churchill, Registration No. 39,944
 Terri L. Sale, Registration No. P45,066

Send Correspondence to:

M. John Carson, Esq.

Direct Telephone Calls to: *(name and telephone number)* 213-892-9200
 M. John Carson, Esq.

Full name of sole or first inventor	
Sywe N. Lee	
Sole or first inventor's signature	
<i>Sywe N. Lee</i>	Date
	22 October 1999
Residence	
4F, No. 75, Sec. 1, Hsin Tai Wu Road, Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.	
Citizenship	
U.S.A.	
Post Office Address	
same as above	

Full name of second inventor, if any	
David Wayne	
Second inventor's signature	
<i>David C. Wayne</i>	Date
	22 October 1999
Residence	
17350 N. Hartford Drive, Scottsdale, AZ 85255, U.S.A.	
Citizenship	
U.S.A.	
Post Office Address	
same as above	